

承认书

SPECIFICATION FOR APPROVAL

Part No. HWA703V8FL-2S-SP-SB
Description:
Revision: 1.1
Customer.
Customer Approval No. :

承认鉴章后请寄回承认书正本一份

Please return to us one original of “SPECIFICATION FOR APPROVAL” with your approved signatures.

承认书 APPROVED SIGNATURES	
使用方	承制方
核准人 APPROVED BY:	核准人 APPROVED BY:
日期 DATE:	日期 DATE:
盖章签署 CHOP & SIGNATURES:	盖章签署 CHOP & SIGNATURES:

深圳市华云电源有限公司

SHENZHEN HWAWAN POWER CO. LTD.

深圳市南山区西丽沙河西路 5298 号百旺研发大厦 1 栋 10 楼 1020 室

Room 1020, 10/F, Building 1, Baiwang Research and develop Mansion, No.5298, Shahe West Road, Xili, Nanshan, Shenzhen, Guangdong.

电话 Tel: (86) 755-22678080

传真 Fax: (86) 755-22678082

公司网址 Web: [Http://www.hwa-power.com](http://www.hwa-power.com)

HWA703V8FL-2S-SP-SB


Power Supply product with dual outputs

HWA703V8FL-2S-SP-SB is an AC / DC multiplex output, standby / enabling control power product designed for LED display products, Rated output: +V1:4.0V/40A, +V2:3.0V/30A, V_SB: 4.0V/1A, The power supply has the following characteristics:

- ◆ +V1 and +V2 have a current sharing function and can be used in parallel
- ◆ The power supply has a Power Good signal which can be used to detect the operating status of the power supply
- ◆ Small size: 185mm*55mm*28mm(L*W*H)
- ◆ Light weight : ≤450g
- ◆ High efficiency: 88%(@Input: 230VAC, Outputs: full load)
- ◆ Small Leakage current: <1.0mA
- ◆ Output voltage +V1 can be adjusted from 3.8V to 4.3V
- ◆ Output voltage +V2 can be adjusted from 2.8V to 3.2V
- ◆ Output voltage V_SB: 4.0V
- ◆ With a standby / enable control function
- ◆ EMI standard: EN55032 CLASS B
- ◆ Wide operating temp. range: -40~+70℃(+50℃ ~+70℃ linear de-rated, referring to fig. 1)
- ◆ Wide Input voltage range: 90VAC~264VAC
- ◆ Power factor: ≥0.95
- ◆ Cooling mode: conduction cooling
- ◆ Output over-voltage protection
- ◆ Output over-current protection
- ◆ Output short-circuit protection
- ◆ Over temperature protection
- ◆ Compliance with UL, CE, CCC, FCC certifications



Product Picture

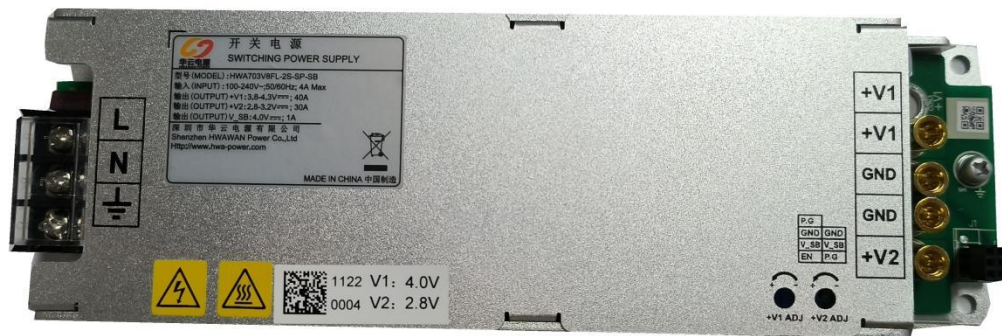

NOTES:

1. The final installation environment of the product needs to meet the environment where the heat sink is simulated. (Refer to fig. 4 for the aluminum radiator size.)
2. The indicators in this specification are the results of testing under the recommended environment. That is, the power supply must be installed on a heat sink with the size of 400*400*3mm.

safety rule

 High voltage	Power input port with high voltage, cannot be touched by hand (Port d'entrée d'alimentation à haute tension, ne peut pas être touché à la main)
 Warning	The power supply is a product with large leakage current. Please ground reliably before powering on. When install the product, the metal enclosure needs to be reliably earthed, and the earthing connection is to be evaluated in the end installation. (L'alimentation est un produit avec un fort courant de fuite. Veuillez mettre à la terre de manière fiable avant de mettre sous tension)
 High voltage	It is strictly forbidden to carry out high voltage and alternating current operation under thunderstorms (Il est strictement interdit d'effectuer des opérations à haute tension et à courant alternatif sous des orages)

1. Specifications


Environmental Requirements					
Parameter	Min.	Typ.	Max.	Unit	Remark
Operating Temperature	-40	/	+70	°C	Full load @-40°C~+50°C. +50°C ~+70°C linear de-rating by 1.25% per degree Celsius.
Storage Temperature	-40	+25	+90	°C	/
Humidity	5	/	95	%	Relative humidity, no condensing
Altitude	0	/	5000	m	/
Cooling	/	/	/	/	conduction cooling

Input Characteristics					
Parameter	Min.	Typ.	Max.	Unit	Remark
Input Voltage Range	90	110/220	264	Vac	/
Input Voltage Frequency	47	50/60	63	Hz	/
Power Factor	0.95	/	/	/	@220Vac,full load
Input Inrush Current	/	/	15	A	@240Vac,full load & Cold state
AC Input Mode	/	Single phase input (L, N)	/	/	/
EN enabling port	0	/	0.8	V	Low level, power supply + V1, + V2 normal output
	2	/	5	V	High level, the power supply + V1, + V2 has no output


Output Characteristics						
Parameter		Min.	Typ.	Max.	Unit	Remark
Output Voltage Range	+V1	3.8	4.0	4.3	Vdc	Adjustable
	+V2	2.8	3.0	3.2	Vdc	Adjustable, Keep the pressure difference of not less than 1V from +V1
	V _{SB}	3.8	4.0	4.5	Vdc	The output voltage V _{SB} is not adjustable
Output Voltage Setpoint	+V1	X-0.05	X	X+0.05	Vdc	'X' is the typical value set according to customer's request.
	+V2	Y-0.05	Y	Y+0.05	Vdc	'Y' is the typical value set according to customer's request.
Output Current	+V1	0	/	40	A	Full-voltage input range
	+V2	0	/	30		
	V _{SB}	0	/	1		
Load Regulation	+V1	/	/	±1	%	Rated voltage input, load changing from min. to max.
	+V2	/	/	±1	%	
	V _{SB}	/	/	±5	%	
Output voltage accuracy	+V1	/	/	±2	%	Universal input, full load
	+V2	/	/	±2	%	
	V _{SB}	/	/	±5	%	
Line Regulation	+V1	/	/	±0.5	%	Full range of input voltage, full load
	+V2	/	/	±0.5	%	
	V _{SB}	/	/	±1	%	
Power Good		2.6	2.8	3.0	V	While the output voltage is normal
		/	/	0.5	V	While the output voltage is abnormal
Ripple and Noise (V _{peak-peak})	+V1	/	/	250	mV	Full range of input voltage & load condition, with one 0.1μF film capacitor and one 10μF high frequency electrolyte capacitor in parallel with the end of sensor lines. Use twisted pair with length of 30±2cm as the sensor lines. Oscilloscope band width shall be set to 20MHz, and need to remove the probe cap and ground clamp.
	+V2	/	/	250		
	V _{SB}	/	/	250		

HWA703V8FL-2S-SP-S Output Graphs


1) Load-ambient temperature de-rating curve

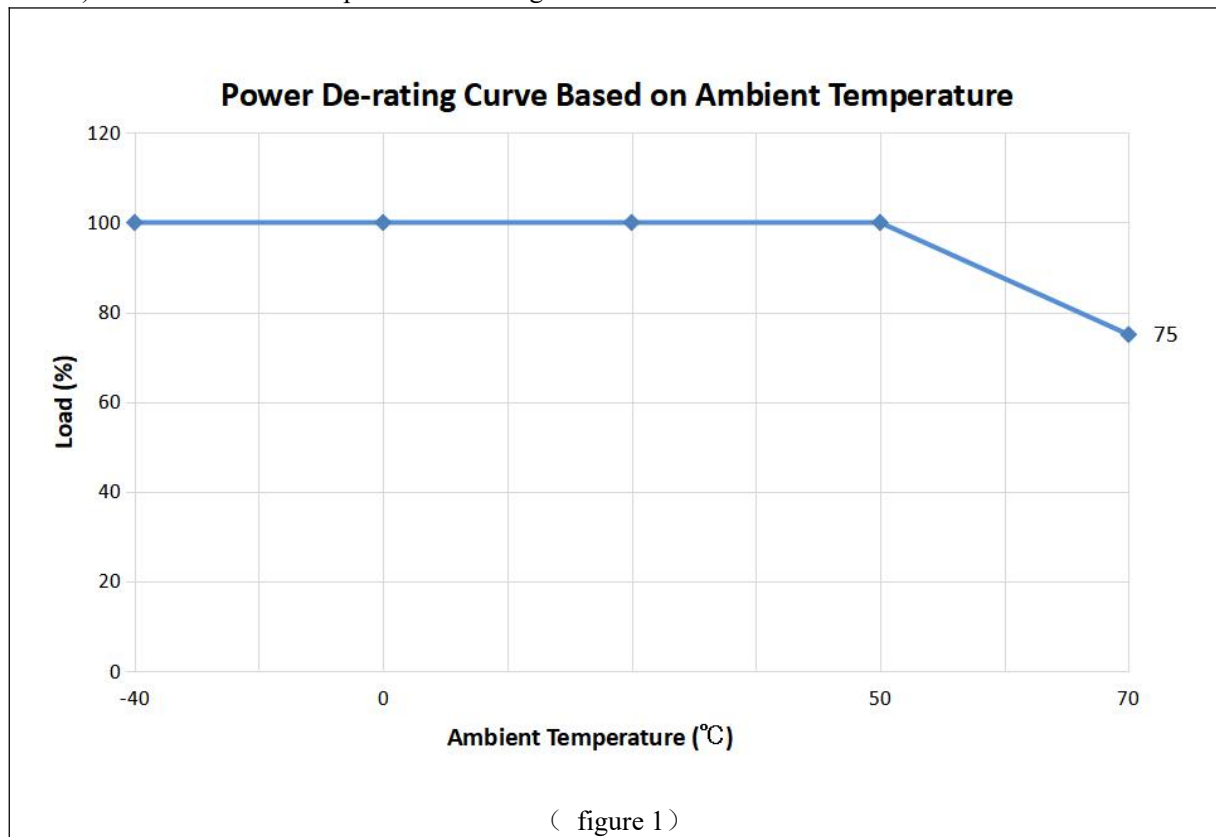

2) load - Input voltage de-rating curve

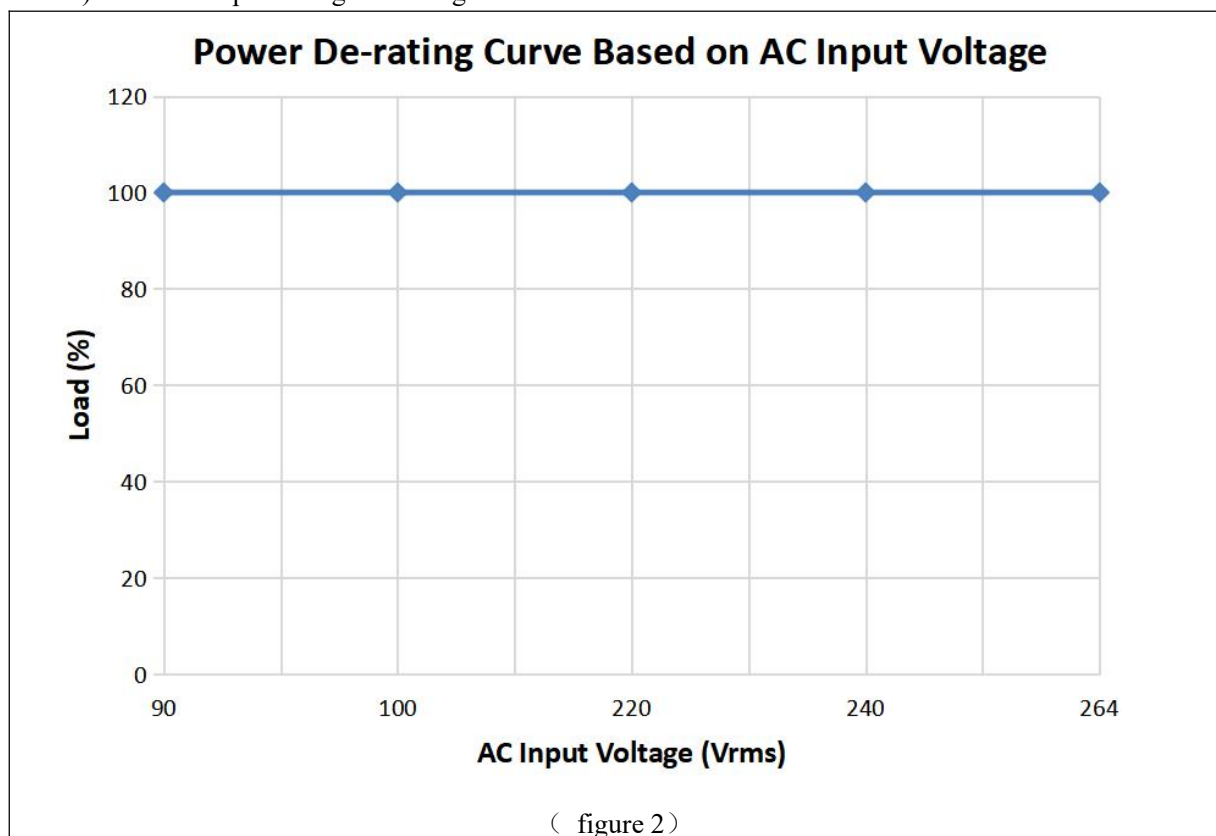


3) Efficiency Curve

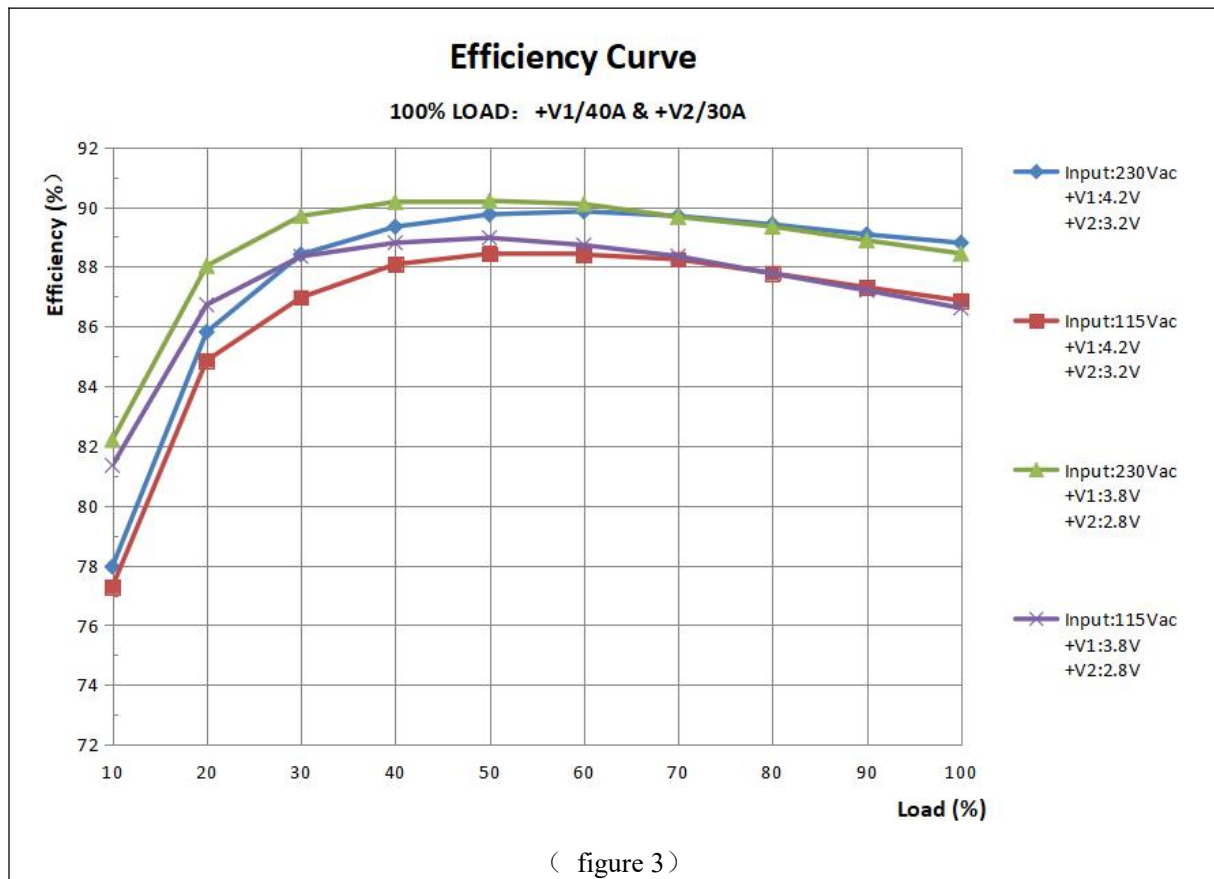

4) Installation requirement

In order to meet the requirement of the de-rating curves and the performance of the whole machine, the actual installation requires that the bottom of the chassis be tightly close to the heat-dissipating aluminum plate or to the case of the system of the same size (the recommended size of the heat-dissipating plate is shown in Figure 4, the unit is mm). In order to optimize heat dissipation, the surface of the aluminum plate must be smooth and coated with thermal grease, and the power supply must be installed on the center of the aluminum plate.

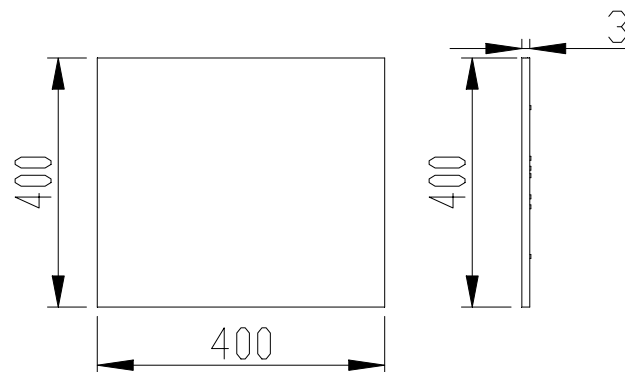

(figure 4) Aluminum Radiator Size

1. Specifications

Miscellaneous					
Parameter	Min.	Typ.	Max.	Unit	Remarks
Efficiency	87	88	/	%	@ 25°C, 230Vac input
Dynamic response 1	/	/	±5	%	Load variation: 25%-50%-25% or 50%-75%-50% Rate: 1A/us, Period: 4ms
Dynamic response 2	/	/	±10	%	Load variation: 5%-100%-5% Rate: 1A/us, Period: 4ms
Temperature coefficient	/	/	±0.02	%/°C	Universal input, full load
Turn On Delay Time	/	/	4	S	Full range of input voltage & load condition
Over/under shoot @ start -up/shutdown	/	/	±10	%	Full range of input voltage & load condition
Rise Time	/	/	100	ms	Rated input, full load
Capacitive loading	/	/	20,000	μF	For LED display product, we recommend that the extra electrolyte capacitor's value should be not less than 2,200μF for per 10A output current.

Protections						
Parameter		Min.	Typ.	Max.	Unit	Remarks
Output Over Voltage Protection	+V1	4.5	/	5.5	V	Self repair
	+V2	3.1	/	4.0	V	Self repair, related to the output setting voltage
	V_SB	5.0	/	5.5	V	Self repair
Output Over Current Protection	+V1	50	/	85	A	Hiccup Mode, output + V2 with full load
	+V2	35	/	55	A	Hiccup Mode, Output + V1 with a load of 1A
	V_SB	1.3	/	1.8	A	Hiccup Mode, When the power supply is in standby state and the main circuit output + V1 & + V2 is turned off
Output Short-circuit Protection		/	/	/	/	Long-term short-circuit endurable. Auto recovery
Over Temperature Protection		85	/	100	℃	Over temperature shutdown, recover automatically. The test point is the surface center of the power supply cover.

1. Specifications


EMC and other parameters		
Item	Level	Standard
CE	CLASS B	EN55032
RE	CLASS B	EN55032
SURGE	Input level B(1.2/50us) line-line : 1kV line-PGND: 2kV	IEC61000-4-5
ESD	level B Contact discharge: $\pm 4\text{kV}$, Air discharge: $\pm 8\text{kV}$	IEC61000-4-2
CS	LEVEL 3; level A; 10V	IEC61000-4-6
RS	Level 3 ; level A; 10V/m	IEC61000-4-3
Immunity to Electrical Fast Transient	$\pm 2\text{kv}$, LEVEL 3, level B	IEC61000-4-4
Voltage fluctuation and Flicker	$P_{st} \leq 1.0$, $P_{lt} \leq 0.65$, $d_c \leq 3\%$, $d_{max} \leq 4\%$ the value of $d(t)$ during a voltage change shall not exceed 3% for more than 200ms	IEC61000-3- 3
Harmonic Current Emission	CLASS A	IEC61000-3- 2 [6]
Audible Noise	45dB(A)	Test distance: 1m
MTBF	$\geq 100,000\text{hrs}$ @ half load/ 25°C	
Electrolytic capacitor life	10 years (test at 25°C), rated input, rated output	
Vibration	Frequency 1-4Hz, acceleration spectral density $0.0001\text{g}^2/\text{Hz}$. Frequency 4-100Hz, acceleration spectral density $0.01\text{g}^2/\text{Hz}$. Frequency 100-200Hz, acceleration spectral density $0.001\text{g}^2/\text{Hz}$. Total rms acceleration: 0.781Grms. Test axis Direction: 3 axes. Test time: 30 min per axis.	
Shock	Half sine wave. Peak acceleration: 300m/s^2 . Pulse width: 6ms. Axis Direction: 6 directions. 3 shocks on each direction.	
Odor	No peculiar and deleterious odor	

Insulation rating		
Parameter	Requirement	Remark
Input - Output	4242Vdc/10mA/1min	No flashover or breakdown
Input - Chassis	2500Vdc/10mA/1min	
Output - Chassis	500Vdc/10mA/1min	
Leakage Current	$< 1.0\text{mA}$	240Vac/50Hz Input
Grounding Resistance	$< 0.1 \Omega$	Test condition: 40A/2mins
Insulation Resistance	@ Normal atmospheric pressure, relative humidity: 90% Testing voltage: 500V dc Insulation of primary-secondary, primary-ground, secondary-ground shall not be less than 10M Ω	

2. Mechanical

Mechanical specifications	
Length (mm)	185 -0/+0.5
Width (mm)	55 -0/+0.7
Height (mm)	28 -0/+0.7
Weight (g)	≤450

Dimensions and mounting holes - terminal coordinates

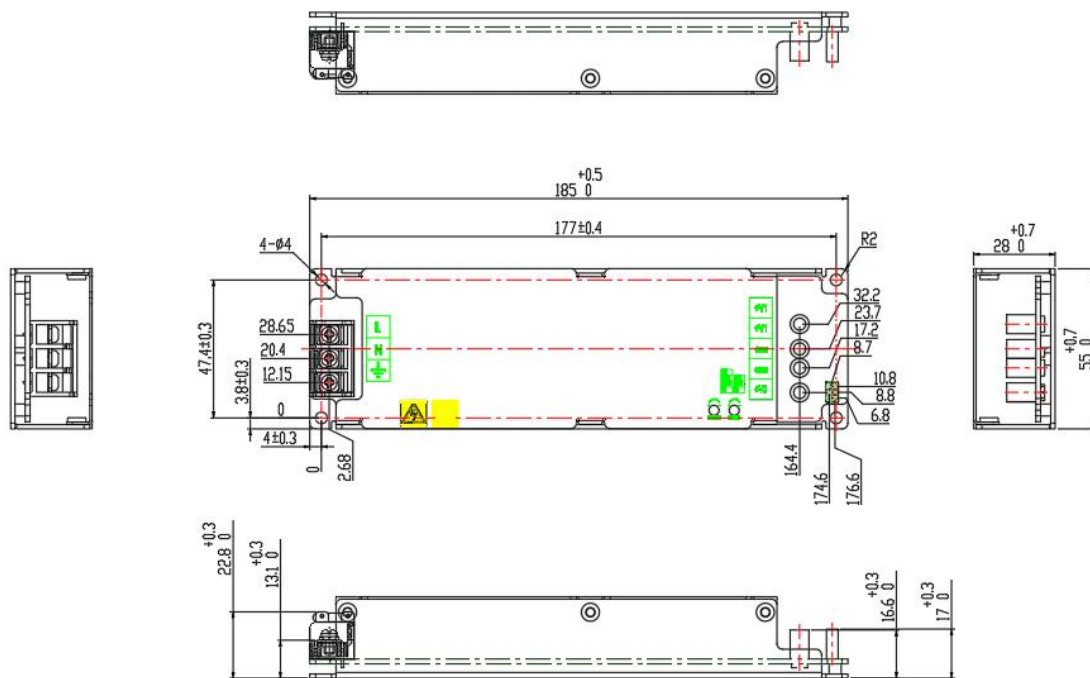

Definition and Installation Notes for Input Terminal and Output Terminal

Name	Function	Maximum Torque	Wiring Diameter
Input Terminal	L	6.5kgf.cm	18AWG min.
	N		
	⏏		
Output Terminal	+V1	N/A	According to the actual situation
	+V1		
	GND		
	GND		

	+V2		
--	-----	--	--

3. Signal



Function Connector(J1):

Signal	Pin No.	Signal definition
GND	1、2	Standby output
V_SB	3、4	Standby output is in a positive extreme port
EN	5	Enable port
P.G	6	Power Good Signal

4. Power supply parallel connection diagram

