

承认书
SPECIFICATION FOR APPROVAL

Part No. HWT-354V6F-SS
Description: _____
Revision: 1.6
Customer. _____
Customer Approval No. : _____

承认鉴章后请寄回承认书正本一份
Please return to us one original of “SPECIFICATION FOR APPROVAL” with your approved signatures.

承认书 APPROVED SIGNATURES	
使 用 方	承 制 方
核准人 APPROVED BY:	核准人 APPROVED BY:
日期 DATE:	日期 DATE:
盖章签署 CHOP & SIGNATURES:	盖章签署 CHOP & SIGNATURES:

深圳市华云电源有限公司
SHENZHEN HWAWAN POWER CO. LTD.
深圳市南山区西丽沙河西路 5298 号百旺研发大厦 1 栋 10 楼 1020 室
Room 1020, 10/F, Building 1, Baiwang Research and develop Mansion, No.5298, Shahe
West Road, Xili, Nanshan, Shenzhen, Guangdong.
电话 Tel: (86) 755-22678080
传真 Fax: (86) 755-22678082
公司网址 Web: [Http://www.hwa-power.com](http://www.hwa-power.com)

HWT-354V6F-SS

— High-efficiency Switching Power Supply product

HWT-354V6F-SS is a High-efficiency power supply designed for LED display products, with a rated output of 4.6V / 35A. The power supply has a current sharing function and can be used in parallel. The power supply has the following characteristics:

- ◆ The power supply has a current sharing function and can be used in parallel
- ◆ The power supply has a Power Good signal which can be used to detect the operating status of the power supply
- ◆ Small size: 150mm*50mm*19mm(L*W*H)
- ◆ Light weight : ≤210g
- ◆ High efficiency: 92%(Input :@230VAC, Output :4.6V/35A)
- ◆ Small Leakage current: ≤0.5mA(Input voltage 264V ,50HZ)
- ◆ Output voltage can be adjusted from 4.2V to 4.6V
- ◆ Input voltage 200VAC~240VAC, output 4.2V/40A
- ◆ EMI standard: EN55032 CLASS A
- ◆ Wide operating temp. range: -40~+70°C(+50 ° C ~ +70 ° C linear de-rating, referring to fig. 1)
- ◆ Wide Input voltage range: 90VAC~264VAC
- ◆ Power factor: ≥0.95
- ◆ Cooling mode: conduction cooling
- ◆ Output over-voltage protection
- ◆ Output over-current protection
- ◆ Output short-circuit protection
- ◆ Over temperature protection
- ◆ Compliance with ETL,CB, CE, FCC ,UL,CCCcertifications



CONFORMS TO
UL STD. 62368-1
CERTIFIED TO CSA
STD. C22.2 #62368-1

Product Picture



NOTES:

1. The final installation environment of the product shall meet the requirements of the simulated cooling environment. (please refer to the aluminum radiator in figure 4)
2. The index in this specification is the result of the test under the recommended environment (power installed on 300*300*3mm aluminum radiator)
3. Warning: In a residential environment, running this device may cause radio

safety rule

 High voltage	Power input port with high voltage, cannot be touched by hand (Port d'entrée d'alimentation à haute tension, ne peut pas être touché à la main)
 Warning	The power supply is a product with large leakage current. Please ground reliably before powering on. When install the product, the metal enclosure needs to be reliably earthed, and the earthing connection is to be evaluated in the end installation. (L'alimentation est un produit avec un fort courant de fuite. Veuillez mettre à la terre de manière fiable avant de mettre sous tension)
 High voltage	It is strictly forbidden to carry out high voltage and alternating current operation under thunderstorms (Il est strictement interdit d'effectuer des opérations à haute tension et à courant alternatif sous des orages)

I. Specifications


Environmental Requirements					
Parameter	Min.	Typ.	Max.	Unit	Remark
Operating Temperature	-40	-	+70	°C	Full load @+50°C. +50 °C ~ +70 °C linear de-rating by 1.25% per degree Celsius.
Storage Temperature	-40	+25	+90	°C	/
Humidity	5	/	95	%	Relative humidity, no condensing
Altitude	0	/	5000	m	
Cooling	/	/	/	/	conduction cooling

Input Characteristics					
Parameter	Min.	Typ.	Max.	Unit	Remark
Input Voltage Range	90	110/220	264	Vac	/
Input Voltage Frequency	47	50/60	63	Hz	/
Power Factor	0.95	/	/	/	@220Vac,full load
Input Inrush Current	/	/	60	A	@220Vac,full load & Cold state
AC Input Mode	/	Single phase input (L、N)	/	/	/

Output Characteristics					
Parameter	Min.	Typ.	Max.	Unit	Remark
Output Voltage Range	4.2	4.6	4.6	Vdc	Output voltage can be adjusted
Output Voltage Setpoint	X-0.05	X	X+0.05	Vdc	‘X’ is the typical value set according to customer's request.
Output Current	0	/	35	A	Universal input (refer to fig.1 & fig.2)
	0	/	40	A	input 200VAC-240VAC ,output 4.2V
Load Regulation	/	/	±1	%	Rated voltage input, load changing from min. to max.
Output voltage accuracy	/	/	±2	%	Universal input, full load
Line Regulation	/	/	±0.5	%	Full range of input voltage, full load
Degree of Current Sharing Imbalance	/	/	5	%	The total output current is greater than 50% of the total maximum output current.
Power Good	2.6	2.8	3.0	V	While the output voltage is normal
	/	/	0.5	V	While the output voltage is abnormal
Ripple and Noise (peak-peak)	/	/	≤180	mV	Full range of input voltage & load condition, with one 0.1uF film capacitor and one 10uF high frequency electrolyte capacitor. oscilloscope band width shall be 20MHz.


HWT-354V6F-SS Output Graphs

1) Load-ambient temperature de-rating curve

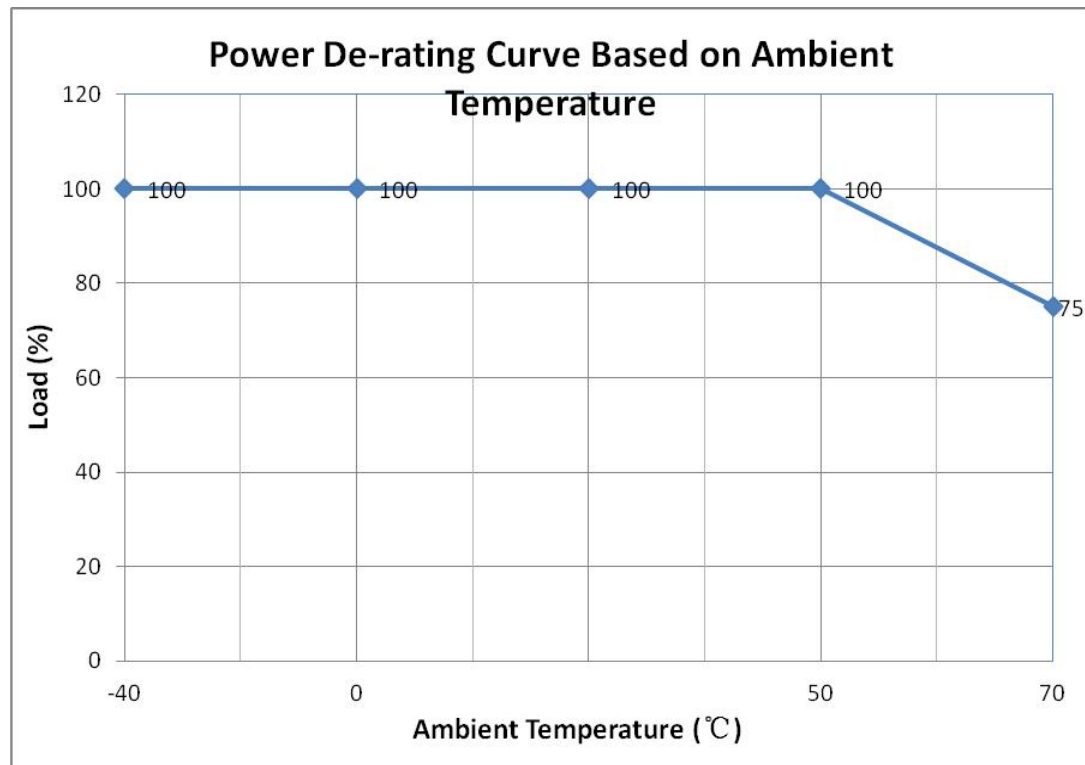


(figure 1)

2) Input voltage - load de-rating curve

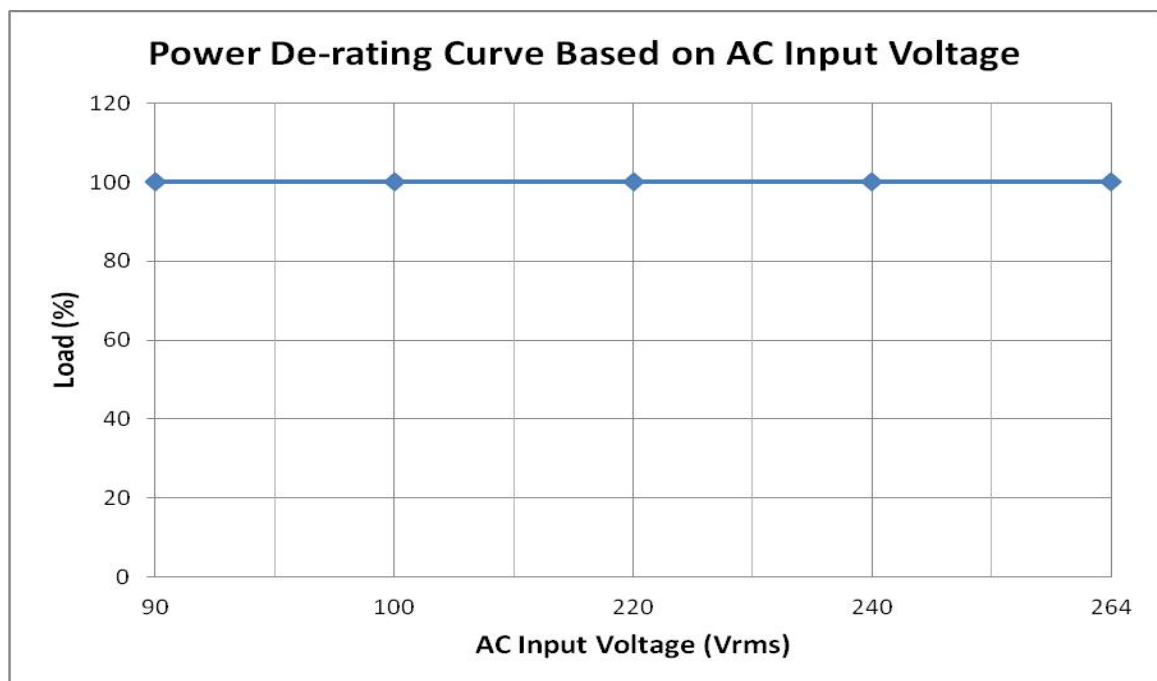


(figure 2)

3) Efficiency Curve

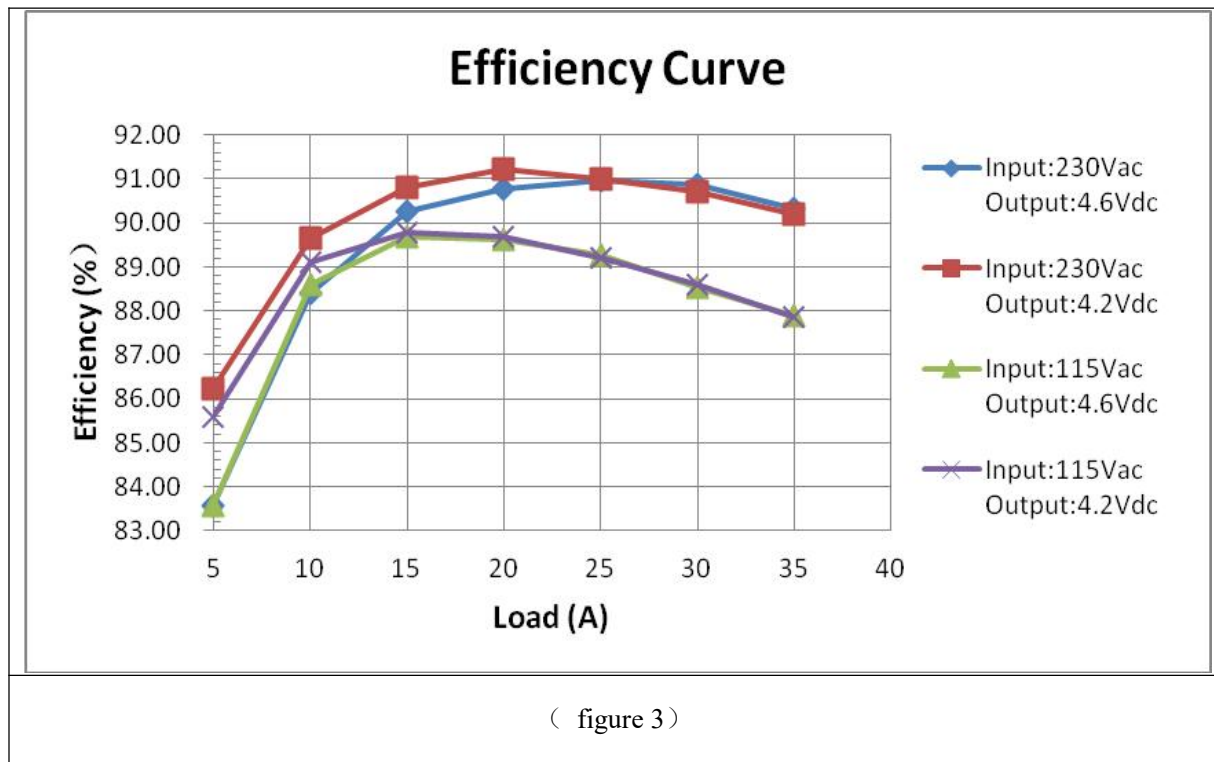

4) Installation requirement

In order to meet the requirement of the de-rating curves and the performance of the whole machine, the actual installation requires that the bottom of the chassis be tightly close to the heat-dissipating aluminum plate or to the case of the system of the same size (the recommended size of the heat-dissipating plate is shown in Figure 4, the unit is mm). In order to optimize heat dissipation, the surface of the aluminum plate must be smooth and coated with thermal grease, and the power supply must be installed on the center of the aluminum plate. (The indicators in this specification are the results of testing under the recommended environment)

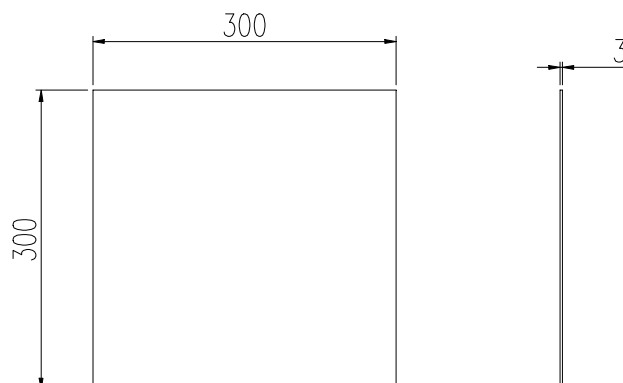

4) Aluminum Radiator Size

1. Specifications

Miscellaneous					
Parameter	Min.	Typ.	Max.	Unit	Remarks
Efficiency	91	92		%	@25°C, 230Vac input, output :4.6V/35A
Dynamic response 1			±5	%	Load variation: 25%-50%-25% or 50%-75%-50% Rate: 1A/us, Period: 4ms
Dynamic response 2			±10	%	Load variation: 5%-100%-5% Rate: 1A/us, Period: 10ms
Temperature coefficient			±0.02	%/°C	Universal input, full load
Turn On Delay Time			2	S	Full range of input voltage & load condition
Over/under shoot @ start -up/shutdown			±10	%	Full range of input voltage & load condition
Rise Time			100	ms	Rated input, full load
Capacitive loading			20,000	uF	For LED display product, we recommend that the extra electrolyte capacitor's value should be not less than 2,200uF for per 10A output current.

Protections					
Parameter	Min.	Typ.	Max.	Unit	Remarks
Output Over Voltage Protection	5.0		6.0	V	Hiccup Mode
Output Over Current Protection	43		60	A	Hiccup Mode
Output Short-circuit Protection					Long-term short-circuit endurable. Auto recovery
Over Temperature Protection	90		100	°C	Over temperature shutdown, recoverable. The test point is located on 55mm from output to the center on the power supply cover.

1. Specifications


EMC and other parameters			
Item	Level		Standard
CE	CLASS A		EN55032
RE	CLASS A		EN55032
SURGE	Input	level B(1.2/50us) line-line : 1kV line-PGND: 2kV	IEC61000-4-5
ESD	level B Contact discharge: ±4kV Air discharge: ±8kV		IEC61000-4-2
CS	LEVEL 3; level A; 10V		IEC61000-4-6
RS	Level 3 ; level A; 10V/m		IEC61000-4-3
Immunity to Electrical Fast Transient	±2kv, LEVEL 3, level B		IEC61000-4-4
Voltage fluctuation and Flicker	Pst≤1.0, Plt≤0.65, dc≤3%,dmax≤4% the value of d(t) during a voltage change shall not exceed 3% for more than 200ms		IEC61000-3- 3
Harmonic Current Emission	CLASS A		IEC61000-3- 2 [6]
Audible Noise	45dB(A)		Test distance:1m
MTBF	≥100,000hrs @ half load/25℃		
Vibration	Frequency 1-4Hz, acceleration spectral density 0.0001g²/Hz. Frequency 4-100Hz, acceleration spectral density 0.01g²/Hz. Frequency 100-200Hz, acceleration spectral density 0.001g²/Hz. Total rms acceleration: 0.781Grms. Test axis Direction: 3 axes. Test time: 30 min per axis.		
Shock	Half sine wave. Peak acceleration: 300m/s². Pulse width: 6ms. Axis Direction: 6 directions. 3 shocks on each direction.		
Odor	No peculiar and deleterious odor		

Insulation rating		
Parameter	Requirement	Remark
Input - Output	3000Vac/10mA//1min	No flashover or breakdown
Input - Chassis	1800Vac/10mA//1min	
Output - Chassis	500Vdc/10mA//1min	
Leakage Current	$\leq 0.5\text{mA}$	240Vac/50Hz Input
Grounding Resistance	$< 0.1 \Omega$	Test condition: 40A/2mins
Insulation Resistance	@ Normal atmospheric pressure, relative humidity: 90% Testing voltage: 500V dc Insulation of primary-secondary, primary-ground, secondary-ground shall not be less than $10\text{M}\Omega$	

2. Mechanical

Mechanical specifications	
Length (mm)	150 ± 0.5
Width (mm)	50 ± 0.7
Height (mm)	19 ± 0.7
Weight (g)	≤ 210


Dimension and mounting hole -- terminal coordinate drawing

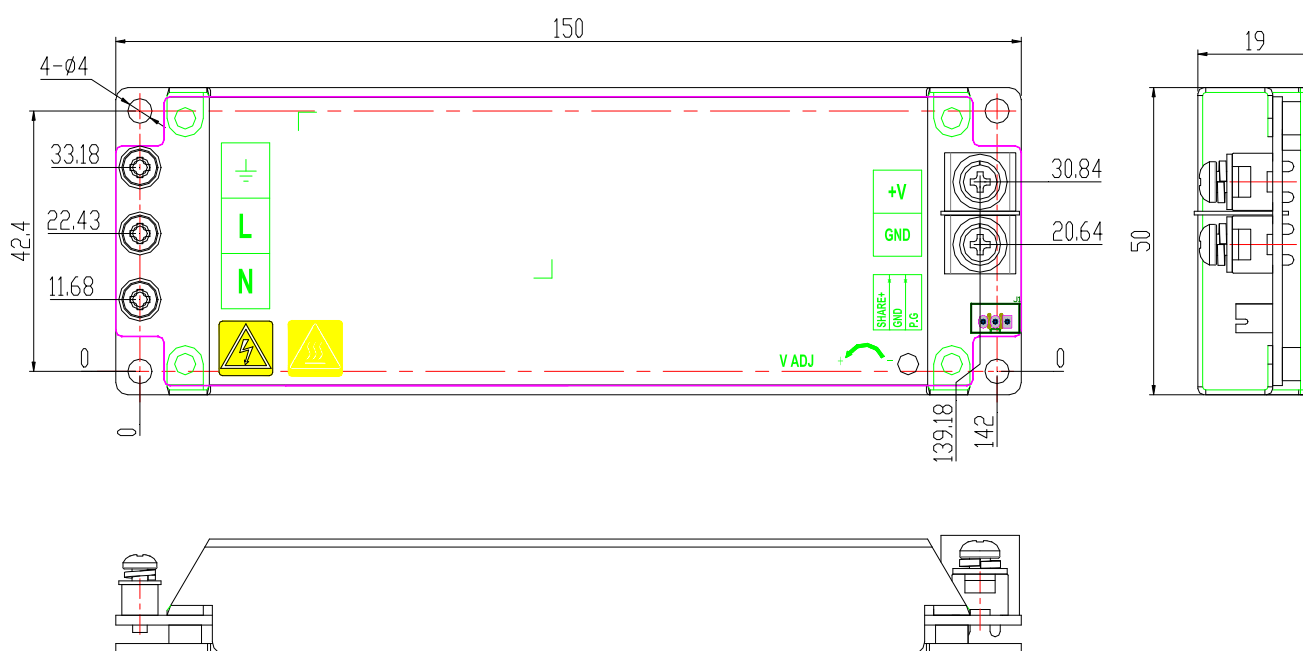

Definition and Installation Notes for Input Terminal and Output Terminal

Name	Function	Maximum Torque	Wiring Diameter
Input Terminal	L	6.5kgf.cm	18AWG min.
	N		
	GND		
Output Terminal	+V	12kgf.cm	According to the actual situation
	+V		
	GND		
	GND		

3. Signal

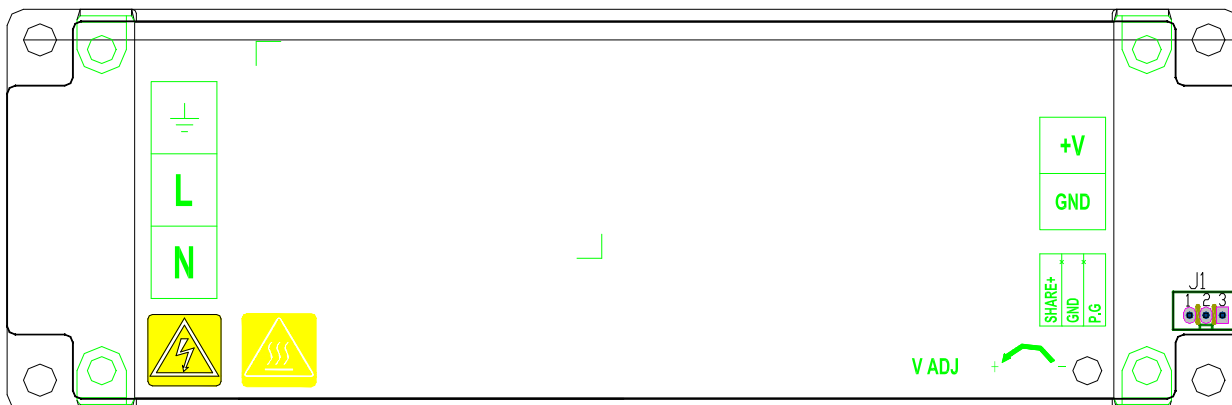

均流信号端子定义:

Component	Pin	Signal	Min.	Typ.	Max.	Unit	Remark
J1	1	SHARE+	3.2	3.5	3.8	V	@full load condition
	2	GND					
	3	P. G (Power Good)	2.6	2.8	3.0	V	Normal Operation

4. Power supply parallel connection diagram

